



## DIMENSIONS

MILLIMETERS(INCHES)


### Unloading Relief Valves(Sub-Plate Type) BUCG-06 Series

#### Ordering Code

**BUC - G - 06 - B - 20**

Series No	Type of Mounting	Valve Size	Pressure Range	Design No
BUC: Unloading Relief Valve	G Subplate Mounting	06: (3/4")	B: 25-70 bar (360-1000 PSI)	20 (G) DIN 912 bolts
		10: (1 1/4")	C: 35-140 bar (500-2000 PSI)	2090 (G) UNC bolts (North America)
			H: 70-210 bar (1000-3000 PSI)	

BUCG-06




BUCG-10



SYMBOL



### BUCG-06 Unloading Relief Valves(Sub-Plate Type)

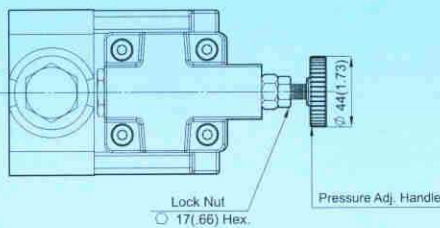

#### Valve Specifications & Attachment

Model	BUCG-06
Flow Rating	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	12 (26.4)
CODE:20	M16 X55LgX2pcs M16 X110LgX2pcs M16 X130LgX2pcs
CODE:2090	5/8-11UNCX2-1/4LgX2pcs 5/8-11UNCX4-1/2LgX2pcs 5/8-11UNCX6LgX2pcs
Surface O-Ring	P9X1pc, P29X2pc

