

Modular relief valve



B.7.1



Technical specification

Specification		02		03	
Max. working pressure (MPa)		31.5			
Max. Flow (L/min)		35		70	
Working fluid		Mineral oil;phosphate-ester			
Fluid temp. (°C)		-20~70			
Viscosity (mm ² /s)		12~380			
Working press (MPa)		7	14	21	31.5
Weight (kg)		1.49 (Single)	2.19 (Double)	3.35 (Single)	4.66 (Double)
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638.It is suggested that the minimum filter rating should be β 10≥75.				

Model description

Modular relief valve

Specification

02 NS 6

03 NS 10

P P Pipeline relief

A A Pipeline relief

B B Pipeline relief

W A B Pipeline relief

Working pressure

5 to5MPa

10 to10MPa

20 to20MPa

31.5 to 31.5MPa

DY - * * - * - * / * 70 *

Remarks

Serial number


Seal material

Omit NBR Seals

V FPM Seals

8 Handle


Code symbol

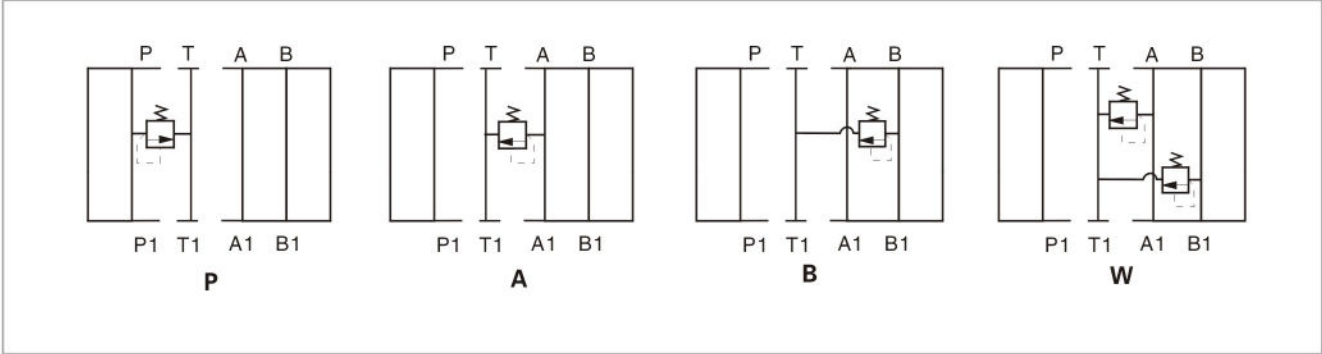


Modular relief valve

02 External dimensions


DY-02-A

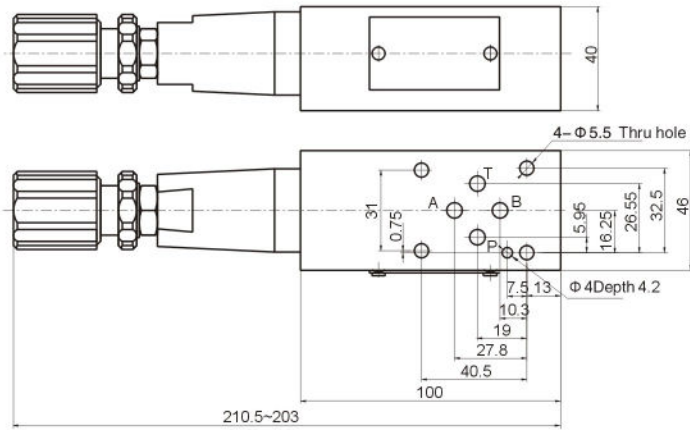

DY-02-B,P

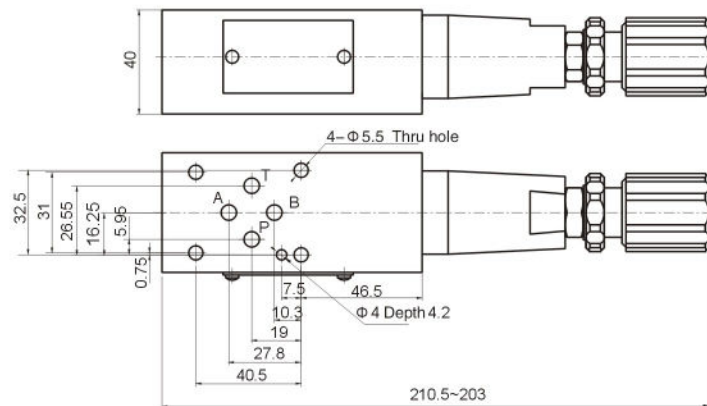


DY-02-W

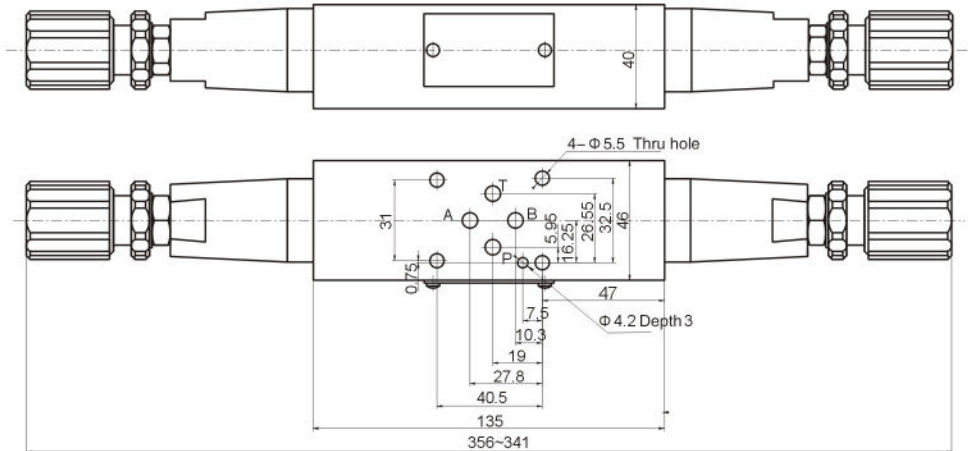


Modular relief valve

03 External dimensions

DY-03-A ...

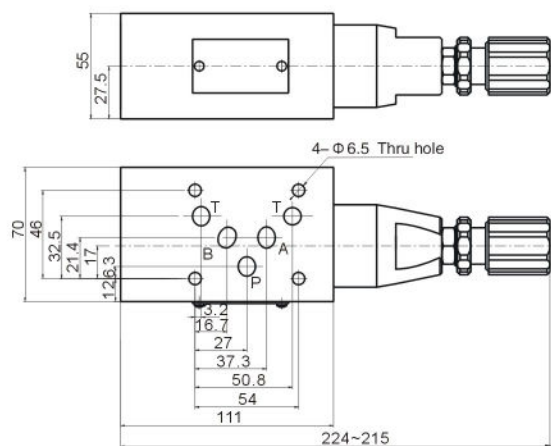

DY-03-B,P ...

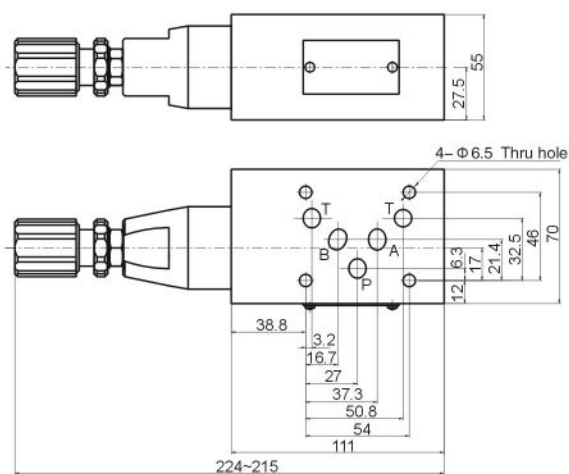

DY-03-W ...

