




# D07 Subplates with Relief Cavity

## Dual Ported Subplate with Main Relief Cavity

Valve mtg: UNC 0.25-20 x 0.50 DP and UNC 0.38-16 x 0.75 DP or  
Metric M6-1.0mm ISO 6H x [12.7] DP and M10-1.5mm ISO 6H x [19.1] DP  
Subplate hardware kit is supplied.  
See page 135 for itemized list.

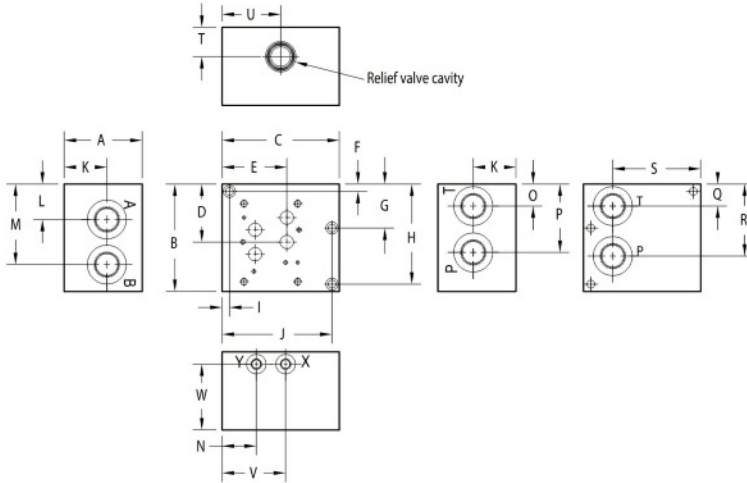

Dimension	A	B	C	D	E	F	G	H
*D07SPRVC12*	2.75 [69.9]	4.75 [120.7]	4.00 [101.6]	2.34 [59.4]	2.81 [71.4]	0.38 [9.5]	--	4.37 [111.0]
*D07SPRVS12*	2.50 [63.5]	4.75 [120.7]	4.00 [101.6]	2.34 [59.4]	2.81 [71.4]	0.38 [9.5]	--	4.37 [111.0]
*D07SPRVC16*	4.00 [101.6]	5.50 [139.7]	6.00 [152.4]	2.97 [75.4]	3.31 [84.2]	0.38 [9.5]	2.25 [57.2]	5.13 [130.2]
*D07SPRVS16*	4.00 [101.6]	5.50 [139.7]	6.00 [152.4]	2.97 [75.4]	3.31 [84.2]	0.38 [9.5]	2.25 [57.2]	5.13 [130.2]

Dimension	I	J	K	L	M	N	O	P
*D07SPRVC12*	1.38 [35.1]	2.00 [50.8]	1.50 [38.1]	1.50 [38.1]	3.12 [79.2]	1.19 [30.2]	1.19 [30.2]	2.78 [70.6]
*D07SPRVS12*	1.38 [35.1]	2.00 [50.8]	1.25 [31.8]	1.50 [38.1]	3.12 [79.2]	1.19 [30.2]	1.19 [30.2]	2.78 [70.6]
*D07SPRVC16*	0.38 [9.5]	5.63 [142.9]	2.19 [55.6]	1.81 [46.0]	4.13 [104.8]	1.75 [44.5]	1.00 [25.4]	3.50 [88.9]
*D07SPRVS16*	0.38 [9.5]	5.63 [142.9]	2.19 [55.6]	1.81 [46.0]	4.13 [104.8]	1.75 [44.5]	1.13 [28.6]	3.50 [88.9]

Dimension	Q	R	S	T	U	V	W
*D07SPRVC12*	1.13 [28.6]	2.75 [69.9]	2.81 [71.4]	1.75 [44.5]	2.22 [56.4]	2.81 [71.4]	2.25 [57.2]
*D07SPRVS12*	1.13 [28.6]	2.75 [69.9]	2.81 [71.4]	1.25 [31.8]	2.31 [58.7]	2.81 [71.4]	2.00 [50.8]
*D07SPRVC16*	1.13 [28.6]	3.69 [93.7]	4.50 [114.3]	1.50 [38.1]	3.00 [76.2]	3.25 [82.6]	3.38 [85.7]
*D07SPRVS16*	1.13 [28.6]	3.69 [93.7]	4.50 [114.3]	1.50 [38.1]	3.00 [76.2]	3.25 [82.6]	3.38 [85.7]

## Ordering Information

Material	Valve Pattern	Product Type	Circuit	Relief Cavity	Port Threads																																																					
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td><b>A</b></td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td><b>D</b></td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> </tbody> </table> <p>† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</p>	Material		<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa	<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa	<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td><b>D07</b></td> <td>ISO 4401-07-06 NFPA T3.5.1-D07 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		<b>D07</b>	ISO 4401-07-06 NFPA T3.5.1-D07 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Product Type</th> </tr> </thead> <tbody> <tr> <td><b>SP</b></td> <td>Subplate</td> </tr> </tbody> </table>	Product Type		<b>SP</b>	Subplate	<table border="1"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td><b>RV</b></td> <td>Main Relief P to T</td> </tr> </tbody> </table>	Circuit		<b>RV</b>	Main Relief P to T	<table border="1"> <thead> <tr> <th colspan="2">Relief Cavity</th> </tr> </thead> <tbody> <tr> <td><b>C</b></td> <td>Common cavity C-10-2 w/ 12* ports (P in nose) C-10-2 for valves w/1* hex max. C-16-2 w/ 16* ports (P in nose)</td> </tr> <tr> <td><b>S</b></td> <td>Sun Cavity T-3A w/ 12* ports (P in nose) T-16A w/ 16* ports (P in nose) See Tech Info for valves</td> </tr> </tbody> </table>	Relief Cavity		<b>C</b>	Common cavity C-10-2 w/ 12* ports (P in nose) C-10-2 for valves w/1* hex max. C-16-2 w/ 16* ports (P in nose)	<b>S</b>	Sun Cavity T-3A w/ 12* ports (P in nose) T-16A w/ 16* ports (P in nose) See Tech Info for valves	<table border="1"> <thead> <tr> <th colspan="3">P, T, A, B Port Threads</th> <th>X &amp; Y port size (reference)</th> </tr> </thead> <tbody> <tr> <td><b>12P</b></td> <td>0.75-14 NPTF ANSI B1.20.3</td> <td><b>16P</b></td> <td>1.00-11.5 NPTF ANSI B1.20.3</td> <td>0.25-18 NPTF ANSI B1.20.3</td> </tr> <tr> <td><b>12S</b></td> <td>-12 SAE ISO 11926; SAE 1926</td> <td><b>16S</b></td> <td>-16 SAE ISO 11926; SAE 1926</td> <td>-6 SAE ISO 11926; SAE 1926</td> </tr> <tr> <td><b>12B</b></td> <td>0.75-14 BSPP ISO 1179; BS 2779</td> <td><b>16B</b></td> <td>1.00-11 BSPP ISO 1179; BS 2779</td> <td>0.25-19 BSPP ISO 1179; BS 2779</td> </tr> <tr> <td><b>12M</b></td> <td>M27 x 2.0 ISO 6149</td> <td><b>16M</b></td> <td>M33 x 2.0 ISO 6149</td> <td>M14 x 1.5 ISO 6149</td> </tr> <tr> <td><b>12T</b></td> <td>0.75-14 BSPT ISO 7; BS 21</td> <td><b>16T</b></td> <td>1.00-11 BSPT ISO 7; BS 21</td> <td>0.25-19 BSPT ISO 7; BS 21</td> </tr> </tbody> </table>	P, T, A, B Port Threads			X & Y port size (reference)	<b>12P</b>	0.75-14 NPTF ANSI B1.20.3	<b>16P</b>	1.00-11.5 NPTF ANSI B1.20.3	0.25-18 NPTF ANSI B1.20.3	<b>12S</b>	-12 SAE ISO 11926; SAE 1926	<b>16S</b>	-16 SAE ISO 11926; SAE 1926	-6 SAE ISO 11926; SAE 1926	<b>12B</b>	0.75-14 BSPP ISO 1179; BS 2779	<b>16B</b>	1.00-11 BSPP ISO 1179; BS 2779	0.25-19 BSPP ISO 1179; BS 2779	<b>12M</b>	M27 x 2.0 ISO 6149	<b>16M</b>	M33 x 2.0 ISO 6149	M14 x 1.5 ISO 6149	<b>12T</b>	0.75-14 BSPT ISO 7; BS 21	<b>16T</b>	1.00-11 BSPT ISO 7; BS 21	0.25-19 BSPT ISO 7; BS 21
Material																																																										
<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																																									
<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa																																																									
Valve Pattern																																																										
<b>D07</b>	ISO 4401-07-06 NFPA T3.5.1-D07 See Tech Information																																																									
Product Type																																																										
<b>SP</b>	Subplate																																																									
Circuit																																																										
<b>RV</b>	Main Relief P to T																																																									
Relief Cavity																																																										
<b>C</b>	Common cavity C-10-2 w/ 12* ports (P in nose) C-10-2 for valves w/1* hex max. C-16-2 w/ 16* ports (P in nose)																																																									
<b>S</b>	Sun Cavity T-3A w/ 12* ports (P in nose) T-16A w/ 16* ports (P in nose) See Tech Info for valves																																																									
P, T, A, B Port Threads			X & Y port size (reference)																																																							
<b>12P</b>	0.75-14 NPTF ANSI B1.20.3	<b>16P</b>	1.00-11.5 NPTF ANSI B1.20.3	0.25-18 NPTF ANSI B1.20.3																																																						
<b>12S</b>	-12 SAE ISO 11926; SAE 1926	<b>16S</b>	-16 SAE ISO 11926; SAE 1926	-6 SAE ISO 11926; SAE 1926																																																						
<b>12B</b>	0.75-14 BSPP ISO 1179; BS 2779	<b>16B</b>	1.00-11 BSPP ISO 1179; BS 2779	0.25-19 BSPP ISO 1179; BS 2779																																																						
<b>12M</b>	M27 x 2.0 ISO 6149	<b>16M</b>	M33 x 2.0 ISO 6149	M14 x 1.5 ISO 6149																																																						
<b>12T</b>	0.75-14 BSPT ISO 7; BS 21	<b>16T</b>	1.00-11 BSPT ISO 7; BS 21	0.25-19 BSPT ISO 7; BS 21																																																						

For **coating options** see pages 245-246.

In order to constantly improve the quality of our products, we retain the right to make changes to the products and specifications at any time without prior notice.

Customers have the responsibility to continuously check all the information on all data sheets.