
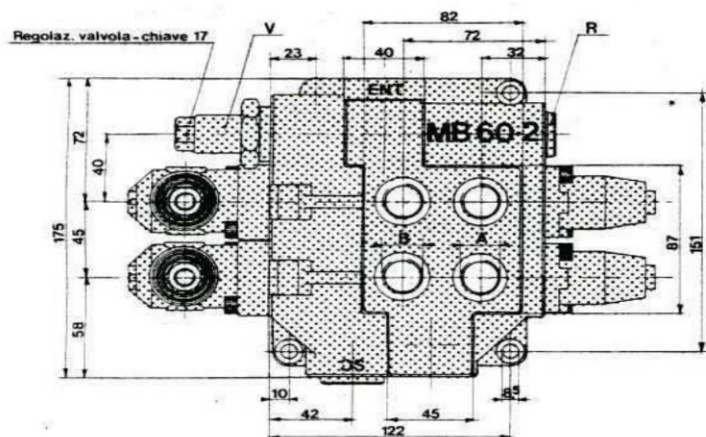


MAX FLOW	80 LIT/MIN
MAX PRESSURE	350 BAR
BACK PRESSURE	80 BAR
LEAKAGE TO 100 BAR	2CC/MIN
WEIGHT	KG. 9,3
CONFIGURATION	PARALLEL

ATTACCHI FILETTATI THREAD DIMENSIONS	
P-A-B	1/2" BSP
S	3/4" BSP

SCHEMA

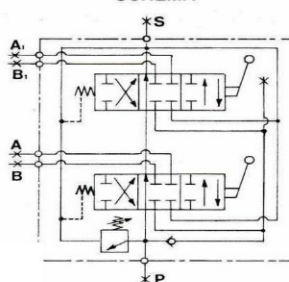

P	Pressione	Pressure - inlets
A-B	Utilizzi	Service ports
S	Scarico	Tank - exhaust
V	Regolazione Press. massima	Relief valve adjustament
R	Tappo valvola controllo carico	Load-checks valve plug
Q	Tappo valvola controllo carico collegam. in serie	Load - checks valve plug