

DIMENSIONI, INGOMBRI, CODICI DI ORDINAZIONE
OVERALL DIMENSIONS AND ORDERING CODE

LUEN

HYDRAULIC VALVES AND
INTEGRATED COMPONENTS
s.r.l. ITALY






VRP-...-L-...

REGOLAZIONE
ADJUSTMENT

Grano
Dowel
(X)

Volantino
Andknob
(Y)

Montaggio a pannello
Panel Mount
(OF)

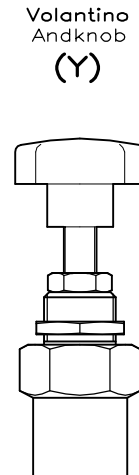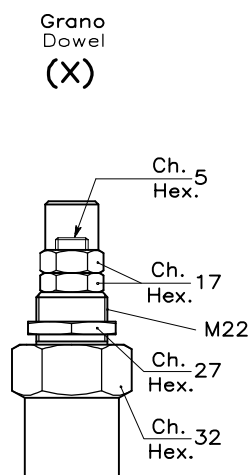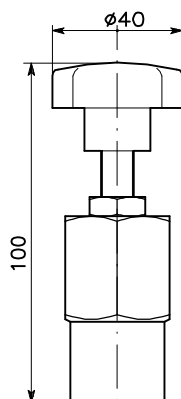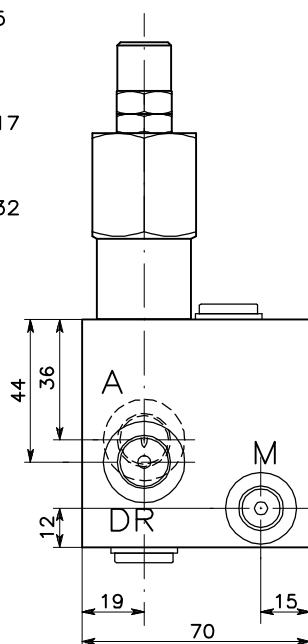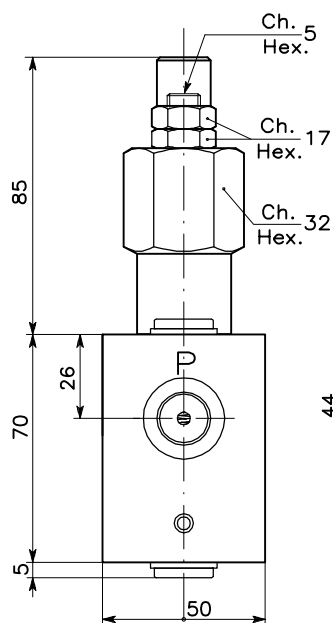

SIGLA VALVOLA VALVE CODE		Attacchi Port size P-A-DR GAS (BSPF)	Attacchi Port size M GAS (BSPF)
VRP-14-L-△-*	049	1/4"	1/4"
VRP-38-L-△-*	050	3/8"	1/4"

TIPI DI MOLLA △					
Campo taratura 5 + 100 bar (Colore blu) Setting range 5 + 100 bar (Colour blue)		Campo taratura 10 + 210 bar (Colore verde) Setting range 10 + 210 bar (Colour green)		Campo taratura 25 + 350 bar (Colore giallo) Setting range 25 + 350 bar (Colour yellow)	
Taratura standard (Q=5 l/1')	Incr. press. bar giro/vite Pressure rise turn of screw	Taratura standard (Q=5 l/1')	Incr. press. bar giro/vite Pressure rise turn of screw	Taratura standard (Q=5 l/1')	Incr. press. bar giro/vite Pressure rise turn of screw
Std. bar setting (mode at 5 l/1')	80 bar (--)	Std. bar setting (mode at 5 l/1')	180 bar (--)	Std. bar setting (mode at 5 l/1')	320 bar (--)
A		B		C	

Regolazione Adjustment *	
Grano Dowel	X
Volantino Handknob	Y

0 0 2 . 0 F
CODICE ORDINAZIONE
ORDERING CODE

Solo per versione a pannello
Panel mount only