



SERIE: 70000

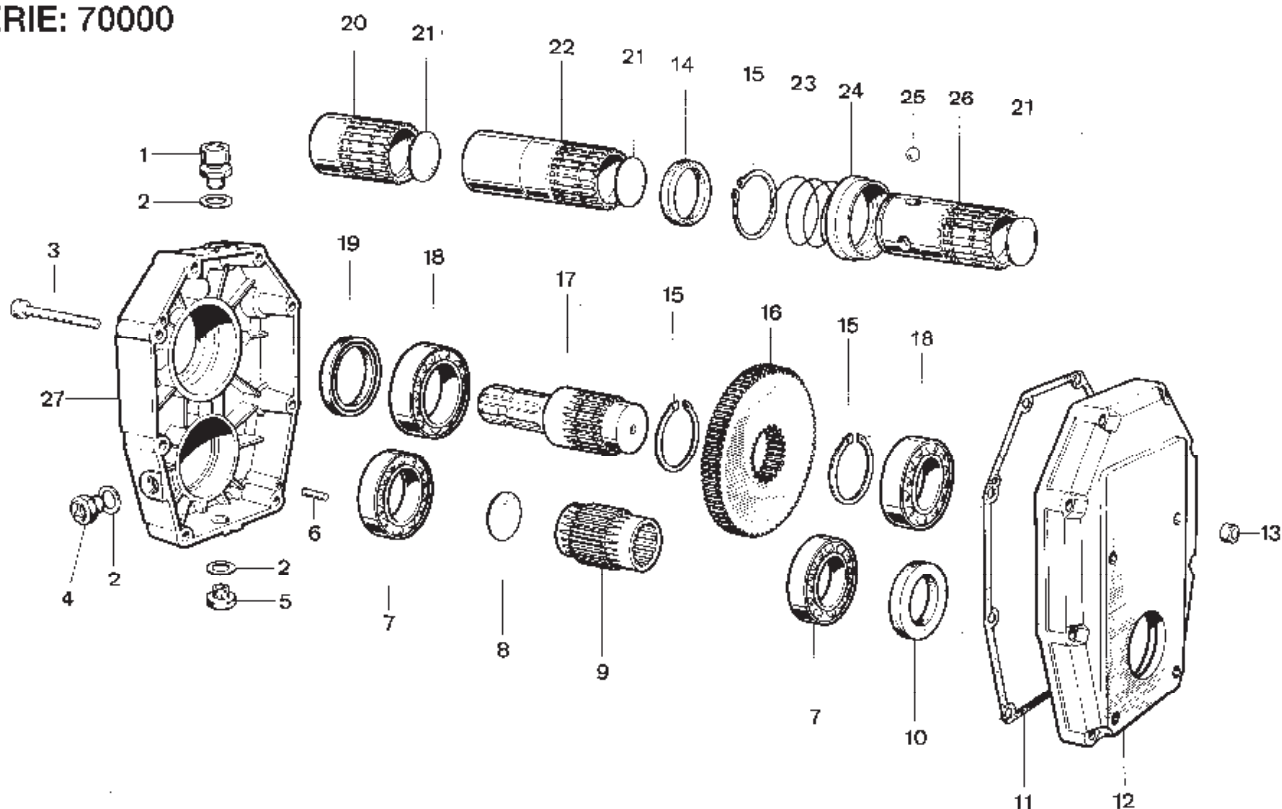


POS.	DENOMINAZIONE	DENOMINATION	DESCRIPTION	BEZEICHNUNG	Q.TA
1	Tappo sfiato olio 3/8"	Bouchon reniflard huile 3/8"	Oil breather plug 3/8"	Entlüftungsschraube 3/8"	1
2	Guarnizione	Joint	Gasket	Dichtung	2
3	Vite T.C.E.I. M8x70	Vis T.C.H.C. M8x70	Socket capscREW M8x70	Zylinderkopfschraube mit Innensechskant M8x70	8
4	Tappo livello olio 3/8"	Bouchon niveau huile 3/8"	Oil level plug 3/8"	Ölstandschräube 3/8"	1
5	Tappo scarico olio 3/8"	Bouchon vidange huile 3/8"	Oil drain plug 3/8"	Ölablaßschraube 3/8"	1
6	Spina	Goupille	Peg	Stift	2
7	Cuscinetto tipo 6009	Palier 6009	Bearing type 6009	Kugellager, Type 6009	2
8	Coperchietto DIN 470 - Ø 37	Petit couvercle DIN 470 D. 37	Cap DIN 470 Ø 37	Deckel DIN 470, Durchm. 37	1
9	Pignone	Pignon	Pinion Gear	Ritzel	1
10	Anello di tenuta Ø 45x65x8	Bague étanchéité 45x65x8	Sealing ring Ø 45x65x8	Dichtring, Durchm. 45x65x8	1
11	Guarnizione	Joint	Gasket	Dichtung	1
12	Coperchio	Couvercle	Cover	Dekel	1
13	Dado M8	Ecrou M8	Nut M8	Mutter M8	8
14	Anello	Bague	Ring	Ring	1
15	Anello seeger Ø 50	Circlip Ø 50	Snap ring dia. 50	Seegerring, Durchm. 50	3
16	Corona	Couronne	Ring gear	Zahnkranz	1
17	Albero presa di forza maschio 1 3/8"	Arbre prise de force mâle 1" 3/8	Male P.T.O. shaft 1" 3/8	Antriebswelle mit Aussenverkeilung 1 3/8"	1
18	Cuscinetto tipo 6010	Palier 6010	Bearing type 6010	Kugellager, Type 6010	2
19	Anello di tenuta Ø 50x65x8	Bague d'étanchéité 50x65x8	Sealing ring Ø 50x65x8	Dichtring, Durchm. 50x65x8	1
20	Albero presa di forza femmina 1 3/8" corto	Arbre prise de force femelle 1" 3/8 court	Female P.T.O. shaft 1" 3/8 short	Antriebswelle mit Innenverkeilung 1 3/8", kurz	1
21	Coperchietto DIN 470 - Ø 40	Petit couvercle DIN 470 D. 40	Cap DIN 470 Ø 40	Deckel DIN 470, Durchm. 40	3
22	Albero presa di forza femmina 1 3/8" lungo	Arbre prise de force femelle 1" 3/8 long	Female P.T.O. shaft 1" 3/8 long	Antriebswelle mit Innenverkeilung 1 3/8", lang	1
23	Molla	Ressort	Spring	Feder	1
24	Anello	Bague	Ring	Ring	1
25	Sfera	Bille	Ball	Kugel	3
26	Albero presa di forza femmina attacco rapido	Arbre prise de force femelle attelage rapide	Female P.T.O. shaft quick fitting	Antriebswelle mit Innenverkeilung, mit Schnellkupplung	1
27	Scalola	Carcasse	Housing	Gehäuse	1

SERIE: 70000



920266

Anello di centraggio pompa Gr. 2

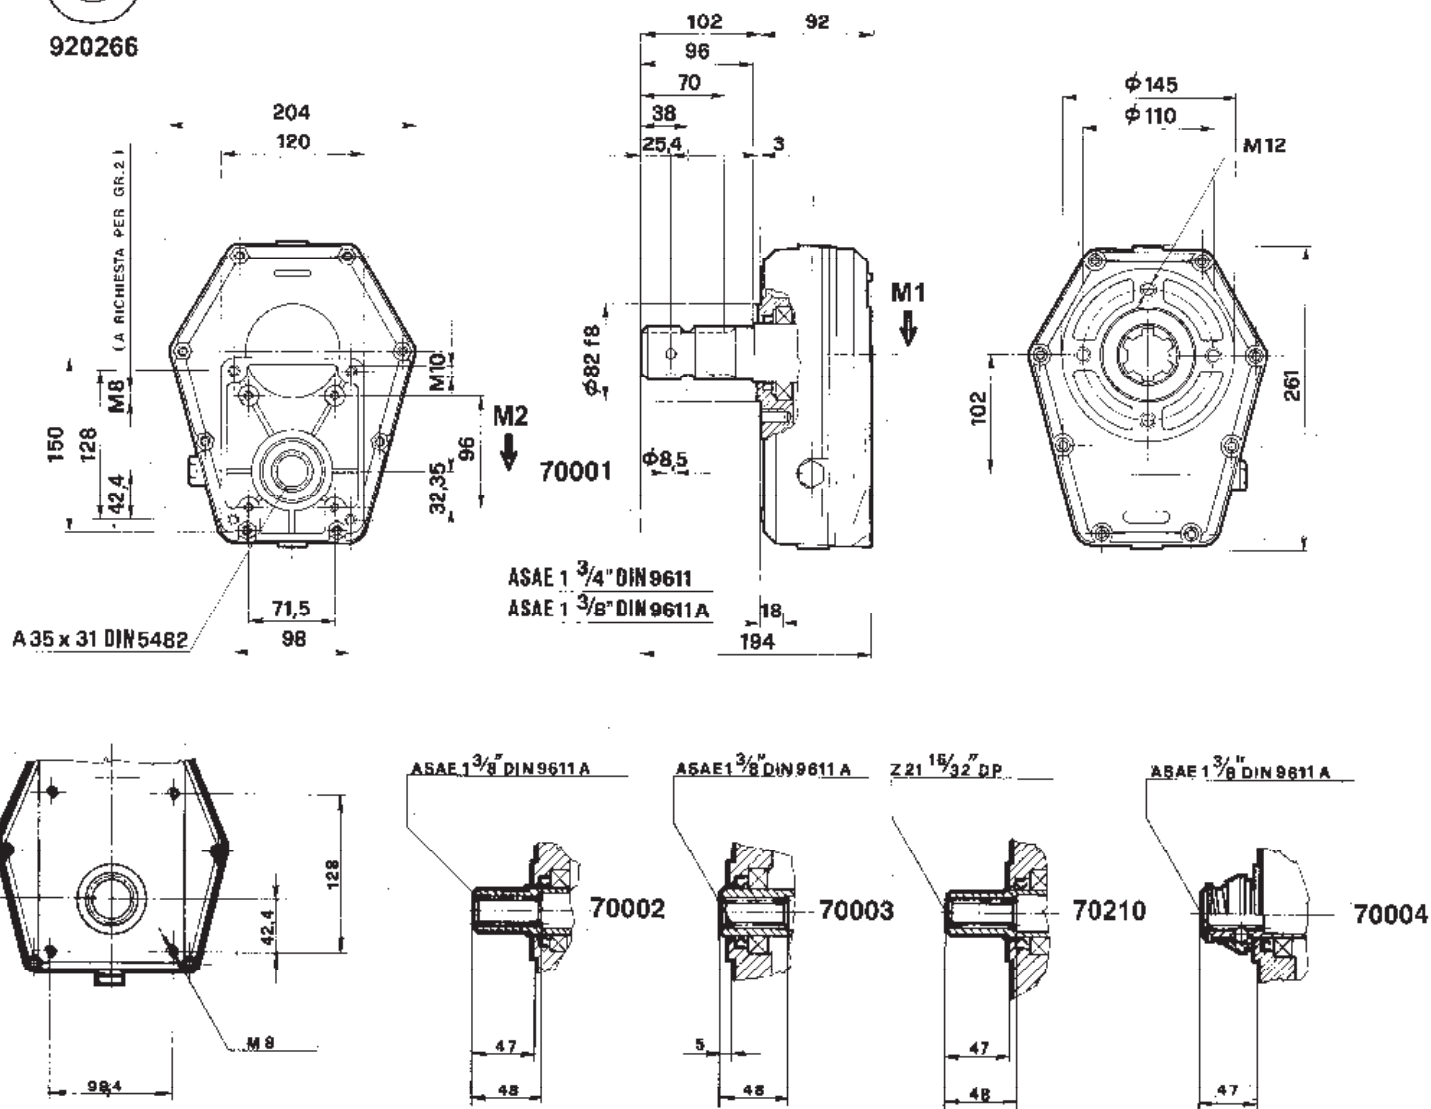

Livello max olio: Lt. 0,350

M1	M2	N. 1 GIRI/1' TOURS/1' R.P.M. U/min	N. 2 GIRI/1' TOURS/1' R.P.M. U/min	I	POTENZA KW	G
daNm	daNm			N. 1 / N. 2		Kg
31	31	540	540	1	20	8,1
38	26	540	810	1,5	20	8,1
43	21	540	1080	2	20	8,1
46	18	540	1408	2,5	20	8,1
49	16	540	1620	3	20	8,1
46	13	540	1836	3,5	20	8,1
43,7	11,5	540	2057	3,8	20	8,1